


## CBB61/C61-Ⅲ型交流金属化薄膜电容器.....C组合电容

## Type CBB61/C61-Ⅲ Metallized film capacitor A.C.....C combined capacitor

CBB61/C61-Ⅲ型 交流金属化薄膜电容器

Type CBB61/C61-Ⅲ Metallized film capacitor A.C

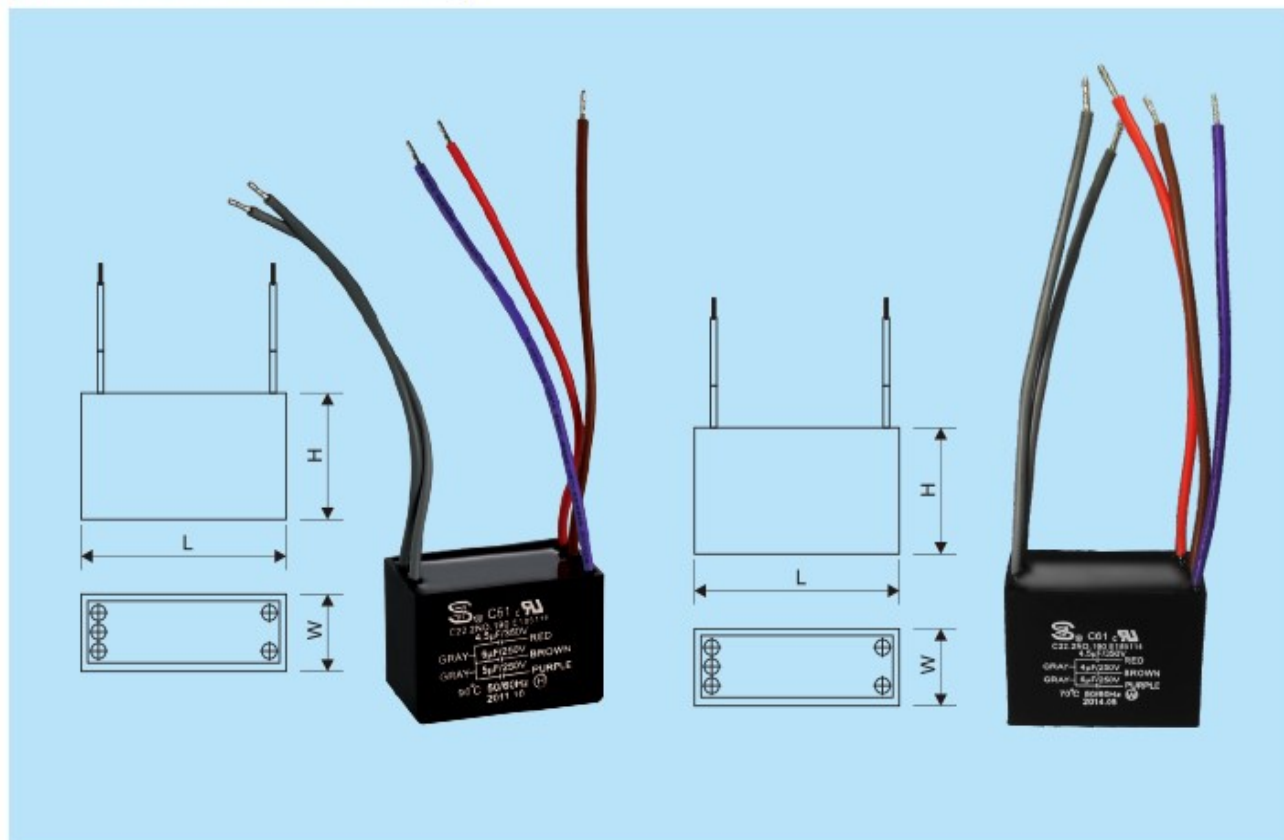

◆ **执行标准**：满足《IEC：60252-1-2011》《UL810-2008》《GB3667.1-2005》标准；

◆ **产品特点**：结构紧凑，自愈性能优异，电容量稳定，使用安全可靠等特点。

◆ **产品用途**：广泛用于豪华吊扇、风机、电风扇等电器及设备的电机起动运行。

◆ **主要技术参数**：

额定电压：110V.AC-600V.AC

容量偏差：±3%、±5%、±10%

损耗角正切值：tg δ ≤ 0.0025(100Hz)

极间耐压：2Un/5s

极壳耐压：2000V.AC or 2Un+1000VAC

产品认证：VDE、UL、CUL、CQC

稳态过电压：允许1.1Un下长期运行

稳态过电流：允许1.3In下长期运行

优选气候类别：40/70/21 40/85/21 40/105/21

运行等级：C(3000h)

安全等级：P0

**Reference Standard:** Meet the requirements of standard 《IEC:60252-1-2011》《UL810-2008》《GB3667.1-2005》

**Product Characteristic:** Compact structure, good self-healing performance, stable capacitance and usage safety and dependable.

**Application:** They are widely used for ceiling fan, draught fan, fan...etc electrical appliances and equipments start and running.

**Technical Specification:**

**Rated Voltage:** 110V.AC-600V.AC

**Capacitance Tolerance:** ±3%、±5%、±10%

**Dissipation factor:** tg δ ≤ 0.0025(100Hz)

**Voltage Proof (Vt-t):** 2Un/5s

**Voltage Proof (Vt-c):** 2000V.AC or 2Un+1000VAC

**Product Certificates:** VDE、UL、CUL、CQC

**Steady state overvoltage:** Permit long term of operation under 1.1Un

**Steady state overcurrent:** Permit long term of operation under 1.3In

**Climate Category:** 40/70/21 40/85/21 40/105/21

**Class of Operation:** C(3000h)

**Safety Class:** P0

◆CBB61/C61-Ⅲ型号常用规格表：（见附表）

CBB61/C61-Ⅲ型交电容器规格表  
Type CBB61/C61-Ⅲ Capacitor specification sheet

电压 尺寸 容量	电压 Voltage																				
	250V/250V/250V			300V/250V/250V			350V/250V/250V			400V/300V/300V			450VAC/250V/250V			500VAC/400V/400V			500VAC/450V/450V		
容量 Capacitance	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W
1+2+2	40	35	22	40	35	22	40	35	22	40	35	22	40	35	22	42	35	25	50	34	23
1.2+1+2	40	35	22	40	35	22	40	35	22	40	35	22	40	35	22	42	35	25	50	34	23
1.5+2.5+2.5	40	35	22	40	35	22	40	35	22	40	35	22	40	35	22	50	34	23	50	34	30
1.75+2+3	40	35	22	40	35	22	40	35	22	40	35	22	40	35	22	50	34	23	50	34	30
2+2+2	40	35	22	40	35	22	40	35	22	40	35	22	42	35	25	50	37	24	50	34	30
2+2.5+2.5	40	35	22	40	35	22	40	35	22	40	35	22	42	35	25	50	37	24	50	34	30
3+4+2.5	40	35	22	40	35	22	42	35	25	50	34	23	50	34	23	50	43	30	50	43	30
3.5+5+5	40	35	22	50	31	22	50	34	23	50	37	24	50	37	24	/	/	/	/	/	/
3.5+4+6	40	35	22	50	31	22	50	34	23	50	37	24	50	37	24	/	/	/	/	/	/
4+6+5	40	35	22	50	31	25	50	34	23	50	37	24	50	37	24	/	/	/	/	/	/
4+4+2.5	40	35	22	42	35	23	50	34	23	50	37	24	50	34	30	/	/	/	/	/	/
4+4+6	50	31	22	50	34	24	50	37	24	50	34	30	50	34	30	/	/	/	/	/	/
4+6+8	50	34	23	50	37	23	50	37	24	50	43	30	50	43	30	/	/	/	/	/	/
4.3+6+5	42	35	25	50	34	23	50	37	24	50	34	30	50	43	30	/	/	/	/	/	/
4.5+4+6	42	35	25	50	34	25	50	37	24	50	34	30	50	43	30	/	/	/	/	/	/
4.5+5+5	42	35	25	50	34	23	50	37	24	50	34	30	50	43	30	/	/	/	/	/	/
5+4+3	40	35	25	42	35	24	50	34	30	50	34	30	50	43	30	/	/	/	/	/	/
5+5+6	50	31	22	50	34		50	34	30	50	43	30	50	43	30	/	/	/	/	/	/
6.5+6+5	50	34	23	50	37		50	43	30	50	43	30	/	/	/	/	/	/	/	/	/

◆特殊要求可根据用户要求协商制作。Special requirement can be fulfilled at the request of customers.